



Marking to ATEX 94/9/EC Directive: Ex II 2 G Ex d IIC Gb / II 2 G Ex e IIC Gb / II 2 D Ex tb IIIC Db

Zone: 1, 2, 21, 22 , Gas Group IIC


Compliance with: IEC 60079-0:2011, IEC 60079-1:2007, IEC 60079-7:2007, IEC 60079-31:2008

EC Type Examination Certificate: ISSeP 12 ATEX 025U



FEATURES

- NMN nipples are mainly used for connecting equipments together or with other components such as elbows, unions ... with female hubs.
- Sizes and threads available are M20 to M100 ISO metric thread or 1/2" to 4" NPT. Other threads upon request.
- Manufactured as standard in galvanized steel. Brass or stainless steel on request.

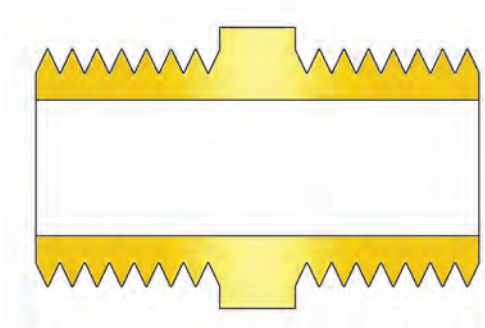

ORDERING INFORMATION

Specify size, material and plating (if required).

Example: 3/4", Galvanized steel nipple.